





MODEL: XC12"

Product id: XC12D0511

## Ø294.5



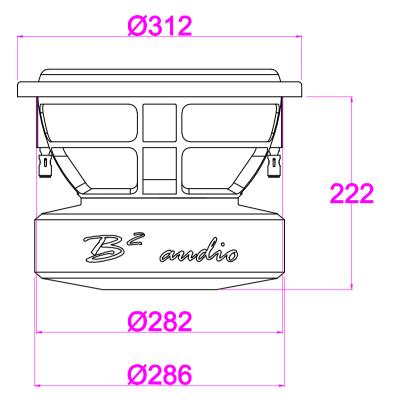

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 86,8 dB Dual 0.5 Ω 30 mm 16,78 L 36,2 Hz 0,256 4,476 0,243 0.5 Ω 3 x 154 Oz


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio






MODEL: XC12"

Product id: XC12D111

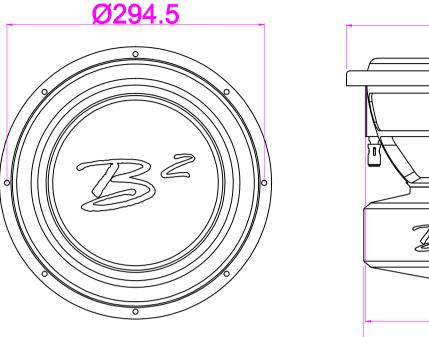

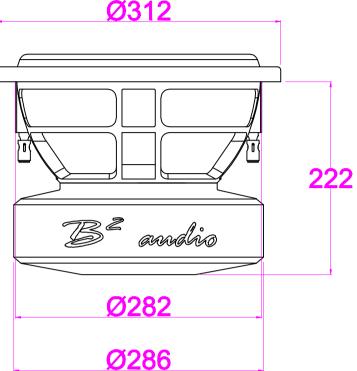

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 86,1 dB Dual 1Ω 30 mm 16,51 L 38,3 Hz 0,356 4,848 0,331 0.9 Ω 3 x 154 Oz


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio





MODEL: XC15"

Product id: XC15D0511

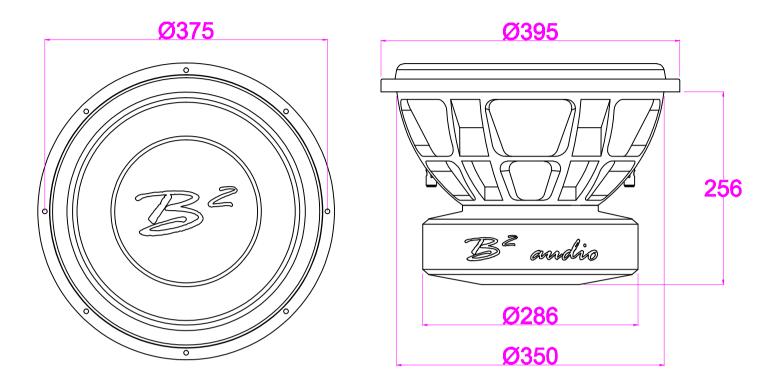

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 89,9 dB Dual 0.5Ω 30 mm 41,76 L 36,1 Hz 0,313 4,58 0,293 0,5 Ω 3 x 154 Oz


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio





MODEL: XC15"

Product id: XC15D111

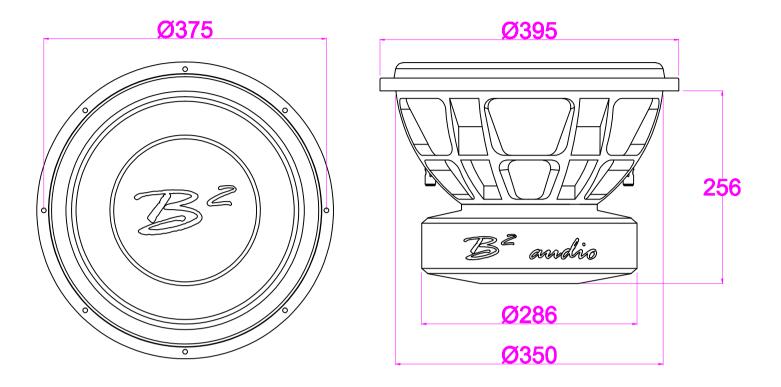

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 89,9 dB Dual 1 Ω 30 mm 42,84 L 36,3 Hz 0,378 4,35 0,348 0,9 Ω 3 x 154 Oz


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio





MODEL: XC18"

Product id: XC18D0511

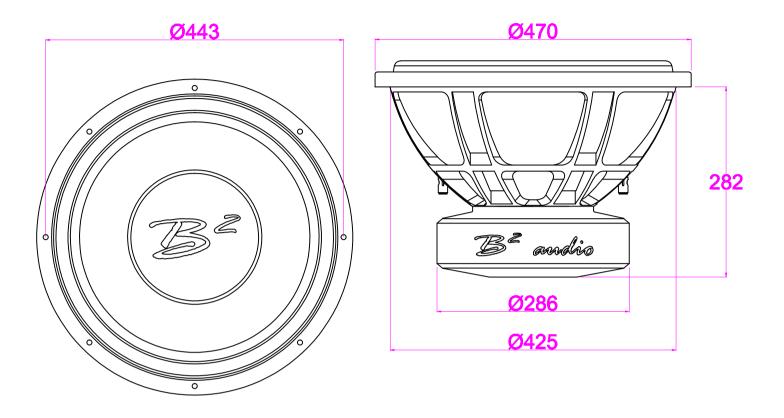

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 92,1 dB Dual 0.5 Ω 30 mm 99,22 L 35,5 Hz 0,359 4,567 0,333 0.5 Ω 3 x 154 Oz


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio





MODEL: XC18"

Product id: XC18D111

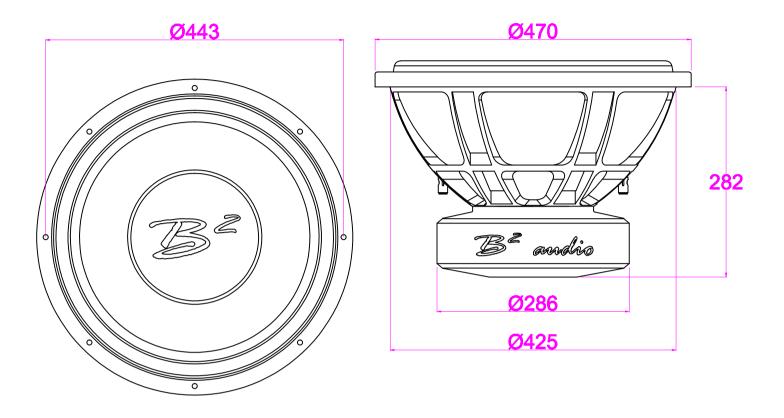

Power handling\*: Sensitivity: Nominal impedance: X-Max: Equivalent Compliance (Vas): Free Air Resonance (Fs): Electrical "Q" (Qes): Mechanical "Q" (Qms): Total Speaker "Q" (Qts): DC Resistance (Re): Magnet weigth (Oz):

3<sup>2</sup> andio

3000 wrms 92,1 dB Dual 1 Ω 30 mm 97,55 L 35,4 Hz 0,413 4,286 0,377 0,9 Ω 3 x 154 Oz

www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com www.facebook.com/b2audio